




EMC Lock-Nuts, Lead-Free Brass

EMC Lock-Nuts, Lead-Free Brass

- For EMC applications of high quality metal machines and housings.
- Lead-free.
- For high quality applications in corrosive environments.
- Safe fastening of EMC cable glands.

Technical Details

Material	Lead-free brass, Nickel plated
Thread Type	<ul style="list-style-type: none"> • Metric EN 60423 • NPSL ANSI B1.20.1

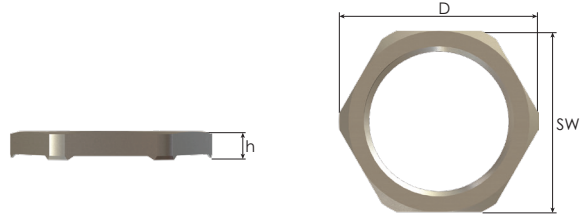

Lead-Free Applications

Thread Type **METRIC** acc. to EN 60423

Inner Thread Size (Female)	Spanner Width SW mm	Outer Ø D mm	Height h mm	Part Number
M12x1,5	15	16,5	3,3	BME1-01 (LF)
M16x1,5	19	21,0	3,5	BME1-02 (LF)
M20x1,5	24	26,5	3,7	BME1-03 (LF)
M25x1,5	30	33,0	3,7	BME1-04 (LF)
M32x1,5	36	39,5	4,0	BME1-05 (LF)
M40x1,5	46	51,0	4,6	BME1-06 (LF)
M50x1,5	60	66,0	5,6	BME1-07 (LF)
M63x1,5	70	77,0	6,7	BME1-08 (LF)

Thread Type **NPSL** acc. to DIN 40430

Inner Thread Size (Female)	Spanner Width SW mm	Outer Ø D mm	Height h mm	Part Number
NPSL 3/8"	22	24,0	5,7	BNE1-01 (LF)
NPSL 1/2"	24	26,5	6,7	BNE1-02 (LF)
NPSL 3/4"	30	33,0	6,5	BNE1-03 (LF)
NPSL 1"	40	44,5	7,6	BNE1-04 (LF)
NPSL 1 1/4"	50	55,5	7,6	BNE1-05 (LF)
NPSL 1 1/2"	58	64,0	8,7	BNE1-06 (LF)
NPSL 2"	70	78,0	10,8	BNE1-07 (LF)

